


Gendrive

Series 2000 Gx6

for Power Generation Continuous Applications
with air-to-air charge air cooling

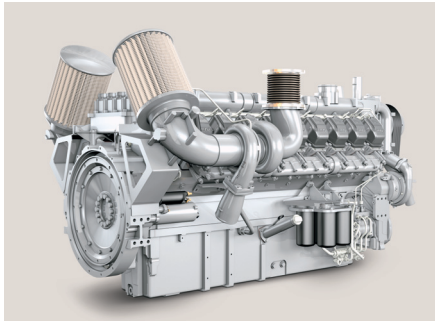



Dimensions and Masses

Engine	Dimensions (LxWxH) mm (in)	Mass, dry kg (lbs)
12V	2038x1548x1421 (80x61x56)	2670 (5586)
16V	2388x1570x1421 (94x62x56)	3125 (6889)
18V	2569x1572x1421 (101x62x56)	3360 (7408)

All dimensions are approximate, for complete information refer to the installation drawing.

Engine Model

Bore/stroke	mm (in)	135/156 (5.3/6.15)
Cylinder configuration		90°V
Displacement/cylinder	l (cu in)	2.33 (136)
Displacement, total	l (cu in)	12V: 26.76 (1633), 16V: 35.68 (2177), 18V: 40.14 (2450)
Fuel specification		EN 590, Grade No.1-D/2-D (ASTM D975-00)



Application group

Continuous Power (3A)

Power definition

Heavy duty service, unrestricted

Load factor: ≤ 100%, Operating hours: unrestricted,
Overload: 10% capability (ICXN)

Power definition according to ISO 3046 (ratings also correspond to SAE J 1995 and SAE J 1349 standard conditions).
Consult your MTU distributor/dealer for the rating that will apply to your specific application.

Rated power is without fan drive. The power consumption of any fan drive has to be deducted during designing of a generator set.



Power. Passion. Partnership.

Continuous Power (3A)

Engine Type	Rated power kW(bhp) at 1500 rpm (50Hz)	Optimization	
		☒	
		Fuel consumption optimized	
12V 2000 B26F	665 (892)	x	
16V 2000 B26F	709 (951)	x	
18V 2000 B26F	887 (1189)	x	

Fan power requirement not considered

☒ reference to emission level in price list

Standard Equipment	
Starting System	1 electric starter (24 VDC/2-pole)
Fuel System	Electronically controlled common-rail high-pressure injection system, dual engine mounted fuel filters
Lube Oil System	Forced feed lubrication system with piston cooling, lube oil circulation pump, lube oil filter, lube oil heat exchanger
Combustion Air System	2 exhaust turbochargers, air-to-air intercooler integrated in radiator
Cooling System	Coolant circulation pump and coolant thermostat for jacket water circuit, engine mounted fan drive, direct engine mounted radiator for jacket water and charge air cooling circuit with integrated expansion tank
Engine Mounting	Set of engine mounting brackets for resilient mount
Engine Management	Integrated electronic engine control and monitoring system ADEC, customer interface „Smart Connect“

Optional Equipment	
Starting System	Hydraulic, compressed air, redundant starting system: electric/electric; air/air; electric/air; electric/hydraulic; air/hydraulic
Fuel System	Fuel pre-filter, special fuel pre-filter with water separator
Combustion Air System	Heavy duty air filters
Cooling System	Radiator for different ambient temperatures and duct requirements
Engine Mounting	Resilient engine mounts (rubber elements), rigid engine mounting
Auxiliary Power Supply	Battery charging alternator

Reference conditions:

- Intake-air temperature: 25°C (77°F)
- Ambient air pressure: 1 bar (14.5 psi)
- Altitude above sea level: 100 m (328 ft)

Subject to change without notice. Customization possible. Engines illustrated in this document may feature options not fitted as standard.